



## 1100 Series

### 1103A-33TG2

Diesel Engine - ElectropaK

59.3 kWm at 1500 rpm

67.5 kWm at 1800 rpm



Building upon Perkins proven reputation within the power generation industry, the 1100 Series range of ElectropaK engines now fit even closer to customers needs.

In the world of power generation success is only gained by providing more for less. With the 1103A-33TG2 Perkins has engineered even higher levels of reliability, yet lowered the cost of ownership.

1100A units are designed for territories that do not require compliance to EPA or EU emissions legislation. These units are able to meet TA luft legislation.

#### Compact, Efficient Power

- 1100 Series is the result of an intensive period of customer research that has guided the development of the range.
- The new 3.3 litre cylinder block ensures bore roundness is maintained under the pressures of operation. It also ensures combustion and mechanical noise is lowered.
- A new cylinder head has re-established Perkins mastery of air control.

#### Quality by Design

- Product design and Class A manufacturing improvements enhance product reliability while maintaining Perkins legendary reputation for durability.

#### Cost Effective Power

- Compact size and low noise.
- Lower fuel consumption and oil use.
- 500 hour service intervals.
- 2 year warranty.

#### Product Support

- Perkins actively pursues product support excellence by ensuring our distribution network invest in their territory - strengthening relationships and providing more value to you, our customer
- Through an experienced global network of distributors and dealers, fully trained engine experts deliver total service support around the clock, 365 days a year. They have a comprehensive suite of web based tools at their fingertips covering technical information, parts identification and ordering systems, all dedicated to maximising the productivity of your engine
- Throughout the entire life of a Perkins engine, we provide access to genuine OE specification parts and service. We give 100% reassurance that you receive the very best in terms of quality for lowest possible cost .. wherever your Perkins powered machine is operating in the world

Engine speed rev/min	Type of Operation	Typical Generator Output (Net)		Engine Power			
				Gross		Net	
		kVA	kWe	kW	bhp	kW	bhp
1500	Prime Power	60	48	55	73.8	53.8	72.1
	Standby Power	66	52.8	60.5	81.1	59.3	79.5
1800	Prime Power	68.1	54.5	63.3	84.9	61.2	82.1
	Standby Power	75.1	60.1	69.6	93.3	67.5	90.5

# 1100 Series

## 1103A-33TG2

### Air inlet

- Mounted air filter

### Fuel system

- Rotary type pump
- Ecoplus fuel filter

### Lubrication system

- Wet sump with filler and dipstick
- Spin-on oil filter

### Cooling system

- Thermostatically controlled system with gear-driven circulation pump and belt-driven pusher fan
- Mounted radiator and piping

### Electrical equipment

- 12 volt starter motor and 12 volt 65 amp alternator with DC output
- 12 volt shutdown solenoid energised to run

### Flywheel and housing

- High inertia flywheel to SAE J620 Size 10/11½
- SAE 3 flywheel housing

### Mountings

- Front engine mounting bracket

### Literature


- User's Handbook

### Optional equipment

- Woodward electronic governor (LCG2)
- Workshop manual
- Parts book

### Option Groups

A selection of optional items is available to enable the customer to prepare a specification precisely matched to the needs.

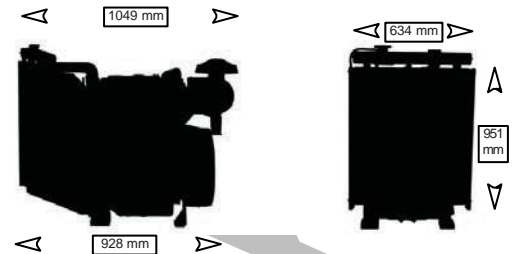

Engine Speed	Fuel Consumption			
	1500 rev/min		1800 rev/min	
	UK g/hr	l/hr	UK g/hr	l/hr
Standby power	3.3	15.4	4.0	18.2
Prime power	3.0	13.9	3.6	16.6
75% of prime power	2.2	10.4	2.7	12.5
50% of prime power	1.5	7.2	1.9	8.8

### General Data

Number of cylinders	3 vertical in-line
Bore and stroke	105 x 127 mm
Displacement	3.3 litres
Aspiration	Turbocharged
Cycle	4 stroke
Combustion system	Direct injection
Compression ratio	17.25:1
Rotation	Anti-clockwise viewed from flywheel
Cooling system	Water-cooled Total
lubrication system	7.9 litres capacity
Total coolant capacity	10.2 litres
	Dimensions
	Length 1049 mm
	Width 634 mm
	Height 951 mm
Dry weight (approx)	420 kg

# POWERMAX

### ADDRESS

Bab-e-Arif Apartment,  
Shop no.A-59, North Karachi.

### WEBSITE

[www.powermaxgenerator.com](http://www.powermaxgenerator.com)

### CONTACT #

+923212010005

### EMAIL

[ajazahmedkhan@powermaxgenerator.com](mailto:ajazahmedkhan@powermaxgenerator.com)  
[info@powermaxgenerator.com](mailto:info@powermaxgenerator.com)  
[coxpower786@gmail.com](mailto:coxpower786@gmail.com)

Power  
**max**  
smart genset